

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
22 December 2005 (22.12.2005)

PCT

(10) International Publication Number
WO 2005/121436 A1

(51) International Patent Classification?: D06F 58/02

(21) International Application Number:
PCT/KR2005/001539

(22) International Filing Date: 25 May 2005 (25.05.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10-2004-0041111 5 June 2004 (05.06.2004) KR

(71) Applicant (for all designated States except US): LG
ELECTRONICS, INC. [KR/KR]; 20 Yoido-dong,
Youngdungpo-gu, Seoul 150-875 (KR).

(72) Inventor; and

(75) Inventor/Applicant (for US only): KIM, Chung-Wook
[KR/KR]; 13-70, Janggoon-dong 2Ga, Hapcho-gu,
Masan-si, Kyungsangnam-do 631-160 (KR).

(74) Agent: HAW, Yong-Nok; 8th Fl. Songchon Bldg.,
642-15, Yoksam-dong, Kangnam-gu, Seoul 135-080 (KR).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AI, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HN, HU, ID, IL, IN, IS, JP, KE,
KG, KM, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM,
PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM,
SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN,
YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,
SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: A DRUM OF LAUNDRY DRYER

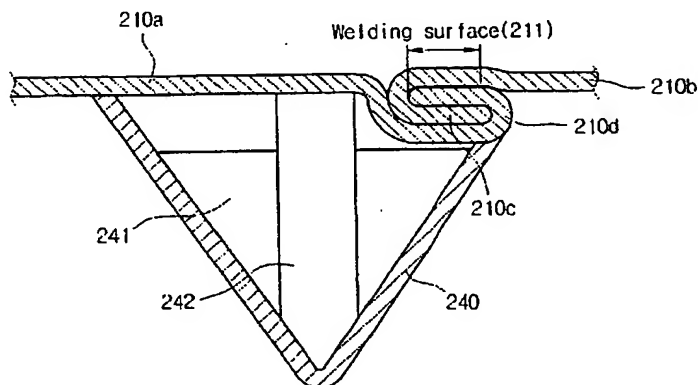

(57) Abstract: A drum assembly of a laundry
dryer includes a cylindrical drum main body
formed through a seam-welding process, a
drum head including a main head rim having
a predetermined width in a direction toward
a center of the drum main body, the main head
rim being coupled to a first end of the drum
main body and provided with a plurality of
elevated portion, and a support sleeve bent
from an end of the main head rim, a drum
rear wall coupled to a second end of the drum
main body and provided with a plurality of hot
wind introducing holes, and a lift coupled to
an inner circumference of the drum main body
to lift the laundry.

BEST AVAILABLE COPY

WO 2005/121436 A1